

Since 1981

Devoted to the Commitments



Pneumatic Accessories

Hydro Pneumatic Controls

An ISO 9001-2008 Certified Company



Flow Control Valve

Size: 1/8", 1/4", 3/8", 1/2", 3/4", 1" BSP



Quick Exhaust Valve

Size: 1/4", 3/8", 1/2" BSP



Slide Valve

Size: 1/4", 3/8", 1/2", 3/4" BSP



Non Return Valve

Size: 1/4", 3/8", 1/2", 3/4", 1" BSP



Silencer

Size: 1/8", 1/4", 3/8", 1/2", 3/4", 1" BSP



Silencer Cum Controller

Size: 1/8", 1/4", 3/8", 1/2", 3/4" BSP

Fittings

We deal with all types of fittings like straight, Elbow, T, Flow Control, Union elbow, Equal 'T', Cross, Multiple 'T', 'Y', etc. Also coupling, tubinings all PU, Hoses, Hydraulic Hose. For Pneumatic working pressure for tube is 15kg / cm².





Filter

Size : 1/8", 1/4", 3/8", 1/2", 3/4", 1", 2" BSP
 Type : Mini, Midi, Standard

Regulator

Size : 1/8", 1/4", 3/8", 1/2", 3/4", 1", 2" BSP
 Type : Mini, Midi, Standard

Lubricator

Size : 1/8", 1/4", 3/8", 1/2", 3/4", 1", 2" BSP
 Type : Mini, Midi, Standard

Filter Regulator Combination

Size : 1/8", 1/4", 3/8", 1/2", 3/4", 1", 2" BSP
 Type : Mini, Midi, Standard

Model Selection Chart


HPC	Type	Port Size	Valve Type
1	2	3	4
HPC	Filter (F) Regulator (R) Lubricator (L) Filter Regulator Lubricator (FRL) Combination Lubricator (FR+L) Flow Control Valve (FCV) Quick Exhaust Valve (QEV) Slide Valve (SV) Non return Valve (NRV) Silencer (S) Silencer cum controller (SC)	1 - 1/8" 2 - 1/4" 3 - 3/8" 4 - 1/2" 5 - 3/4" 6 - 1" 7 - 1 1/2" 8 - 2" (BSP Threads)	Mini (1) Midi (2) Std. (3)

Applications of Compressed Air Dryer

- Industrial applications where ultra-dry air or very low dewpoint (-40°F pressure dewpoint) is required.
- Installations where downstream air systems are exposed to ambient temperatures down to -40°F (-40°C).
- Pneumatic instrumentation and controls. ● Paint spraying, plastic and epoxy coatings, powder coating.
- Engineering and scientific laboratories. ● Controllers, transmitters, valve positioners, operators, air bearings and air motors. ● Audio-Video cassette rewinding machines/CD Plants. ● To protect Actuators. ● Food Packing / Processing / Pharmaceuticals / Tablet Packing.

Features

- Wide range of sizes to suit your requirement 10, 25, 50, 75, 100, 200 SCFM and many more.
- Heated Low Purge models are available for capacities from 200 CFM to 5000 CFM. ● Calibrated needle valve to adjust purge flow to actual outlet flow and pressure conditions. ● Overlapping cycle time to provide constant downstream pressure and dew point. ● Normally open shuttle valves allow constant air flow through dryer even in electricity failure. ● Integral wall mounting models are available to save floor space. ● Easy installation - just make the air connections and plug in the electrical power cord. ● Lightweight and compact ● Inlet and outlets are from top where as purging is from down. ● Facilitates the water flushing out during purging. ● Trouble free and reliable performance.

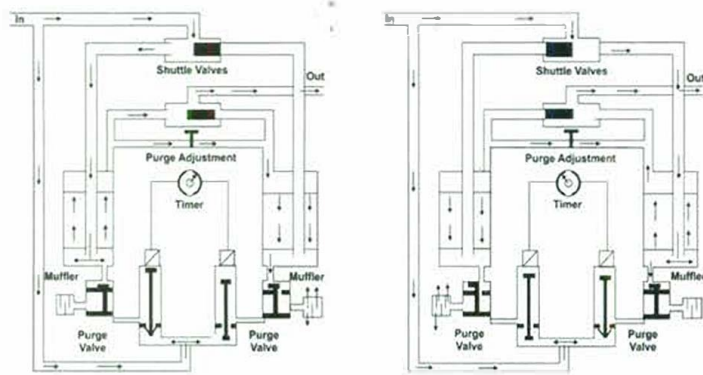

Operation

Two towers, filled with a desiccant which adsorbs water vapour, provide ultra-dry air (-40°C pressure dew point) for operation of sensitive pneumatic devices. Inlet air is dried in one tower during a drying cycle. Simultaneously, the desiccant is dried in the other tower during the regenerative cycle. An electric timer automatically cycles inlet air between the towers every two minutes providing a continuous supply of dry air. Constant downstream pressure and dew point are maintained by overlapping the cycle times (both towers are pressurized briefly before changeover). During the 'regenerative cycle' the desiccant is dried by purging with a small amount of dry air from the on-line tower (Dry air passes through the desiccant and is exhausted to atmosphere). A calibrated needle valve allows the amount of air used for purging to be kept to a minimum. i.e. 5-8%

Technical Specification

Inlet Pressure	Min. 1.4 Kg/Sq. cm Max. 10 Kg/Sq. cm.
Dew Point	Outlet -40°C
Capacity	10, 25, 50, 75, 100, 125, 200 CFM for Heatless Type. More than 200 to 5000 CFM Heated Low Purge Type (HOC)
Ambient Temp	Max. 50°C
Size	Compact
Desiccant	Activated Alumina
Type	Heatless Regenerative Heated Low Purge

Model Selection Chart

Type	Model
1	2
HPC	10
	25
	50
	75
	100
	125
	200

Note : Specifications are subject to change without notice.